

TINE TILLER



HOWARD Alatpertanian Sdn. Bhd.
(Co. No. 30189-A)
No. 2, Jalan Tiga - Batu 20,
48000 Rawang,
Selangor D.E.

No. Tel : 03-60931010
No. Fax : 03-60921010
E-mail : howard@howardmy.com
Website : www.howardmy.com


**ISO 9001:2015 CERTIFIED
ACCREDITED BY SIRIM QAS**



BELI BARANGAN MALAYSIA



BUATAN MALAYSIA
PILIHANBUJAK

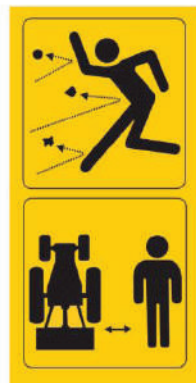



The HOWARD TINE TILLER is a simple strong unit suitable for secondary cultivation in good or marginal conditions. The tine, which is spring loaded, each with two springs, will swing back under a breakaway pressure of approximately 308 lbs. and pass over any obstructions; returning to work once past the obstruction without affecting the working depth of any of the other tines.

The tine and spring assembly can be removed as a single unit for row crop cultivation and can be moved along the toolbar for correct alignment.

The point is a 2" double ended type held in place by two plough bolts. High tensile bolts are used throughout the machine to ensure strength and durability.

MODELS	LENGTH	WIDTH	HEIGHT	WEIGHT
5 TINES	1168 mm	864 mm	1041 mm	123 kgs
7 TINES	1676 mm	864 mm	1041 mm	161 kgs
9 TINES	2184 mm	864 mm	1041 mm	199 kgs
11 TINES	2692 mm	864 mm	1041 mm	265 kgs
13 TINES	3200 mm	864 mm	1041 mm	303 kgs

To serve you—HOWARD is here



Notes:

Continuous R&D may result in changes of specification for the latest model delivered. Howard in ASIA since 1962 For more details and technical support, please contact your local dealers.

Dealer: